

AIR AID[®]


INTAKE SYSTEMS

#300-151 INSTALLATION INSTRUCTIONS

00'-04' Dodge Dakota / 00-03 Durango 4.7L

Thank you for purchasing the Airaid Intake System. Please read the instruction manual carefully before proceeding with the installation. Contact Airaid @ (800) 498-6951 8:00 AM - 5:00 PM MST weekdays for questions regarding fit or instructions that are not clear to you. Your Airaid Intake System was carefully inspected and packaged. Check that no parts are missing, or were damaged during shipping. If any parts are missing, contact Airaid. The air filter element is protected from direct exposure to water and debris; care should be taken not to drive through deep water. WATER INGESTION IS THE DRIVERS RESPONSIBILITY! The air filter is reusable and should be cleaned using the Airaid Filter Tune-Up Kit periodically.

Thank you for selecting Airaid.

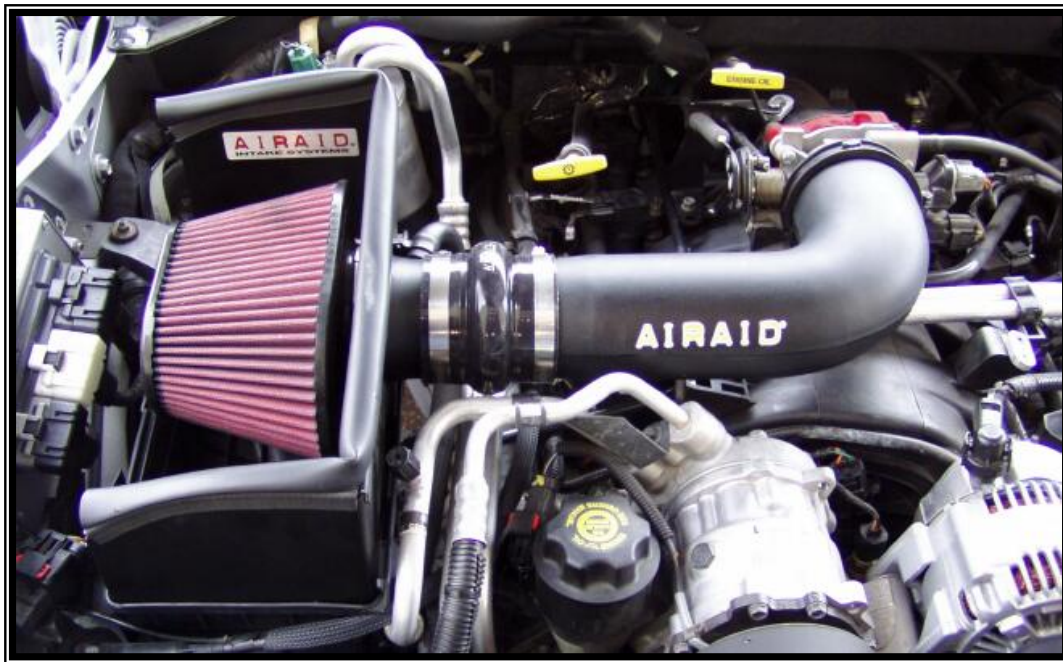

Packing List:

720-440	Airaid Premium Filter	1
KIT117DAC	Cool Air Dam Assembly	1
KIT917T	Modular Intake Tube	1
KITHUMPHS04	Urethane Hump Hose	1
KITWSTRIP02	Weather Strip 26 1/4"	1
KIT151HP	Hardware & Instructions	1
- KITSNP16M4	#16 Speed Clamp	2

Packing List (cont'd):

- KITHS56	#56 Hose Clamp	2
- KITGRMT01	Grommet Plug	1
- KITGRMT02	Grommet w/Thru Hole	1
- KITHOSE01	1/2" x 6" rubber hose	1

Tools Required for this Installation:

Flat Head Screwdriver
10mm Deep Socket



Installation Instructions. Read Me!



1. Disconnect negative battery cable and loosen the intake tube clamp.



2. Disconnect the crankcase breather tube at the air box lid.




3. Unclip the factory air box lid and remove the lid and factory air filter from vehicle.



4. **If your vehicle is equipped with an air temperature sensor,** disconnect and remove the sensor & retain for later installation with Airaid kit.




5. Loosen and remove the two 10mm bolts below the silencer box.

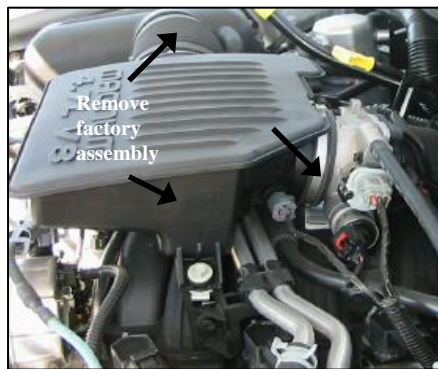


6. Loosen the hose clamp on the throttle body & remove the silencer box & accordion style tube from vehicle.



7. Mount the Airaid Cool Air Dam in place of the original air box lid & snap into place.

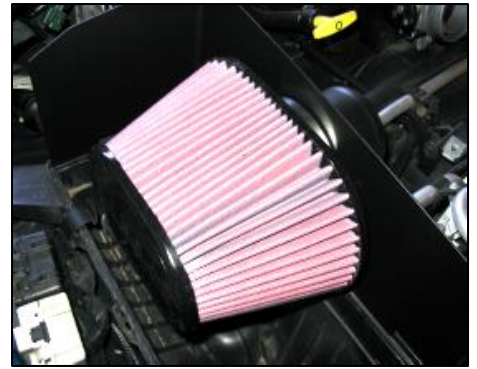

8. Mount the Airaid Premium filter inside the Cool Air Dam and secure with hose clamp provided.

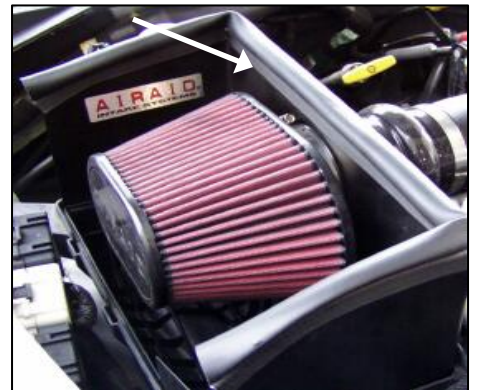

9. Press the weather seal onto the top of the Airaid Cool Air Dam. (*Hint: begin at a corner and work the weather strip towards the ends*)






10. Install the urethane hump hose onto larger end of the Airaid Intake tube using the # 56 hose clamp provided.



11. Reinstall factory throttle body coupler onto smaller end of intake tube.



12. Slide the intake tube into the throttle body & align hump hose with Airaid Cool Air Dam. Slide the hump hose over end of the Airaid Cool Air Dam intake and secure using a #56 hose clamp.

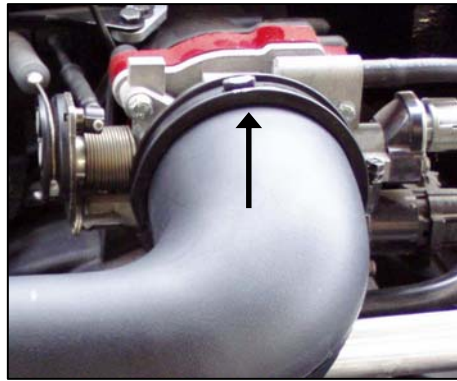


13. Factory coupler must be orientated with the clamp screw at the 12 o'clock position.



14. If your vehicle is equipped with an air temperature sensor, insert the rubber grommet into the hole on the intake tube and mount the air temperature sensor into the grommet.




15. If your vehicle is not equipped with an air temperature sensor, insert the rubber grommet plug into the hole on the intake tube.

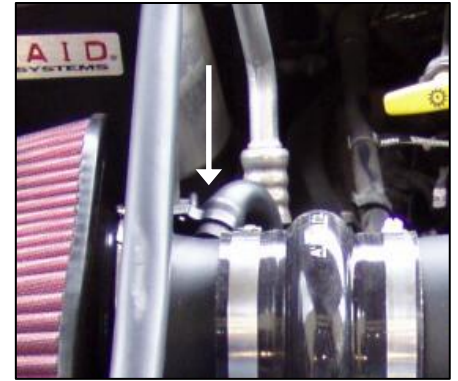

16. Reconnect the crankcase breather hose to the tube on the Airaid Cool Air Dam and secure with the black speed clamp provided. (*Note for 2004: Replace breather hose with new 1/2" ID hose and speed clamps provided.*)

Provision for Some '03 and '04 Models

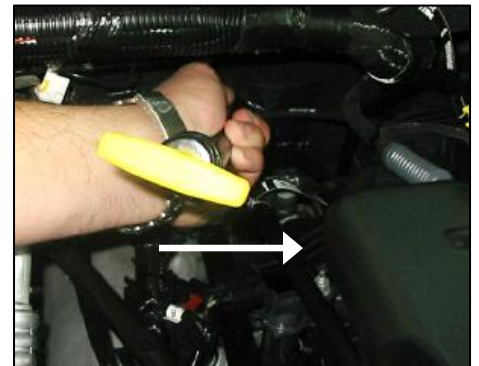

17. If your vehicle is equipped with a dipstick tube that interferes with the location of the Airaid Intake System, an adjustment to the dipstick tube must be made. Firmly grasp the dipstick tube about 6 inches below the top with your left hand and carefully form the tube towards the engine. This will allow for clearance of the Airaid Intake System.

18. Double check your work to be certain that all nuts, bolts, and clamps are securely fastened.

19. Reconnect the negative battery cable.

Included with your Airaid Intake System is a sticker with a California Air Resources Board (C.A.R.B.) Executive Order (EO) number. This sticker must be placed in plain view inside of the engine compartment. Failure to do so may prevent you from passing a smog inspection.

Before



After!



Don't Forget Your AIRAID Filter Tune-Up Kit!



P/N 790-550

Instructions Revision
Date: 06/15/07